

# Installation Instructions for 150052 & 150053 90° Fuel Filter

## Installation Instructions:


**NOTE:** This fuel filter was designed as a pre-filter and is mounted between the fuel tank and fuel pump.

**NOTE:** The outlet of the fuel filter should be mounted at or below the level of the fuel tank pickup.

Mount the fuel filter/fuel pump assembly as close as possible to the fuel tank in a well ventilated area with minimal exposure to road debris. Avoid exposing the pump and fuel lines to moving parts and hot surfaces, such as the exhaust system.

**NOTE:** Increasing distance between the pump and tank will decrease pump efficiency.

**NOTE:** Always lubricate threads and o-ring on port fittings before installation.

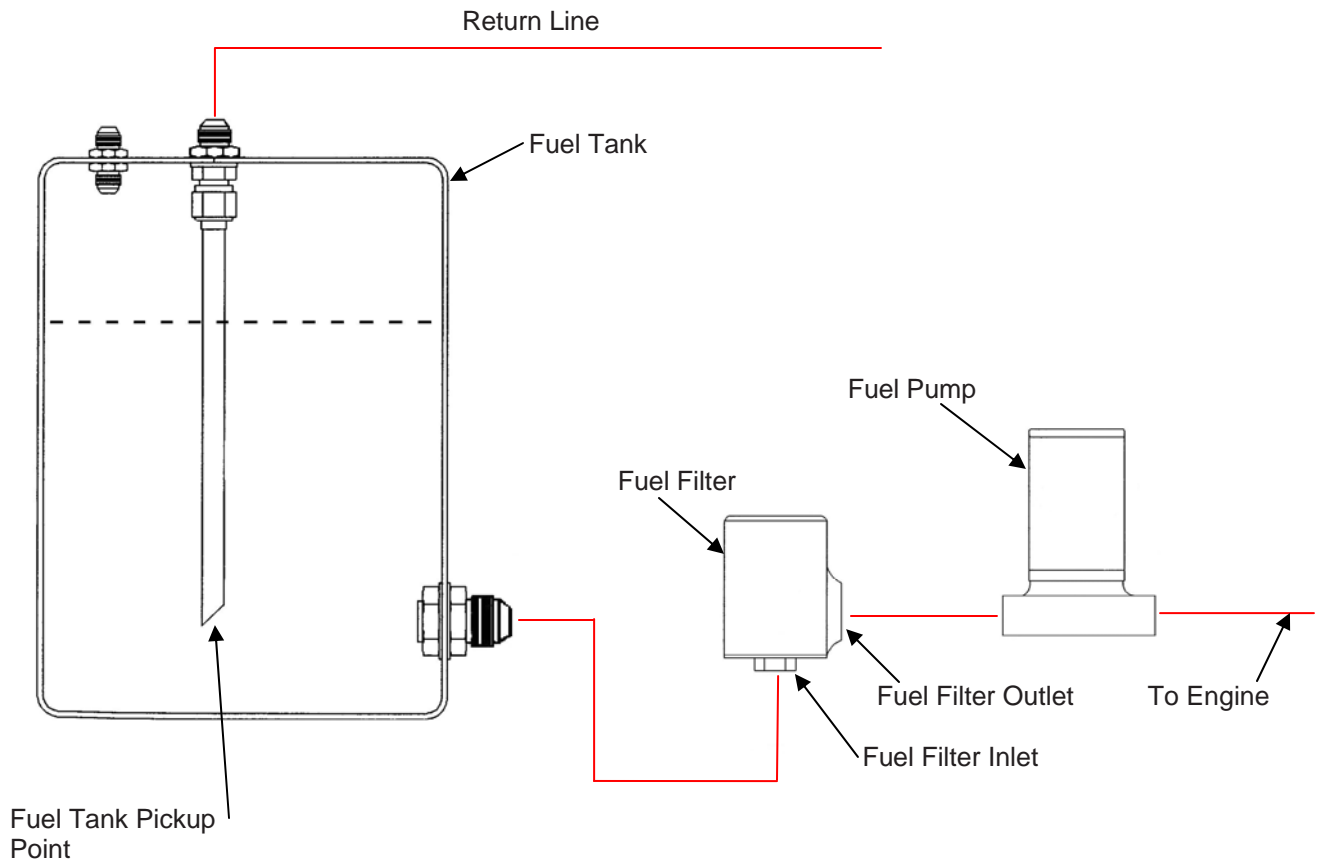

## Fitting Kits Available from JEGS:

- 555-150045 (2) 1/2" NPT Male x -08AN Hose & (1) -08AN Female Swivel x 3/8" NPT Male
- 555-150046 (2) 1/2" NPT Male x -10AN Hose & (1) -10AN Female Swivel x 3/8" NPT Male
- 555-150047 (2) 1/2" NPT Male x -10AN Hose & (1) -10AN Female Swivel x 1/2" NPT Male
- 555-150048 (2) 1/2" NPT Male x -10AN Hose & (1) -10AN Swivel Coupler & (1) -10 AN Port x -10AN Hose



1-800-345-4545 [jeps.com](http://jeps.com)