



Installation Instructions

For Part Numbers:

850-349 Airaid Oiled Media Filter

851-349 SynthaMax Dry Media Filter - Red

Airaid Direct Fit Filter

2004-08 FORD F150 5.4L-V8

2005-07 FORD F250 / F350 5.4L-V8

2005-07 FORD Expedition 5.4L-V8

2005-06 Lincoln Navigator 5.4L-V8

2006-08 Lincoln Mark LT 5.4L-V8




Thank you for purchasing the Airaid Premium Filter. Please read the instruction manual carefully before proceeding with the installation. Contact Airaid @ (800) 498-6951 8:00 AM - 5:00 PM MST weekdays for questions regarding fit or instructions that are not clear to you. Your Airaid Premium Filter was carefully inspected and packaged. The air filter element is protected from direct exposure to water and debris; care should be taken not to drive through deep water. WATER INGESTION IS THE DRIVERS RESPONSIBILITY! The air filter is reusable and should be cleaned periodically.



1. Unfasten clamps and slide the tray out from airbox, remove the stock air filter. Wipe away dirt and debris from the tray and airbox.



2. It is very important to place the AIRAID® air filter in tray with the orientation arrows facing the airbox.

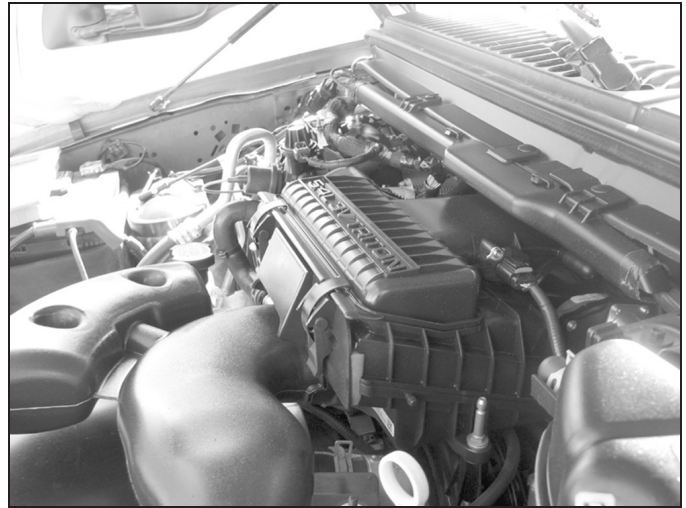

3. Slide the tray with the AIRAID® air filter back into the airbox.

4. Secure the airbox clamps.

For your oiled media filter we suggest using the AIRAID Filter Tune-Up Kit!



P/N 790-551 Aerosol Spray
P/N 790-550 Squeeze Spray

SynthaMax®

DO NOT OIL

Synthamax Air Filters DO NOT require OIL. Service air filter as needed by cleaning with common non-petroleum all purpose household cleaner and water. Simple Green®, Formula 409® or equivalent works great. Apply cleaner to the outside of air filter and allow to soak. Then flush filter clean from the inside out with a garden hose and repeat as necessary. Do not apply high pressure water or air to clean the filter. Allow filter to air dry and then reinstall.