




Part No. ALL60300-60330

Quick Release T-Handle Pins

Positive lock, quick release pins hold tightly in place until the handle button is depressed, allowing the pin to be inserted into or removed from a hole with ease. Handles are made from 380 die cast aluminum, shanks are made from 4130 Steel. Each pin is equipped with a stainless Steel splitting ring, providing the option to attach a cable assembly.

Part No: Description

- ALL60300..... 1/4" x 1"
- ALL60301..... 1/4" x 1-1/2"
- ALL60302..... 1/4" x 2"
- ALL60304..... 5/16" x 1"
- ALL60306..... 5/16" x 2"
- ALL60308..... 5/16" x 3"
- ALL60310..... 3/8" x 1"
- ALL60312..... 3/8" x 2"
- ALL60314..... 3/8" x 3"
- ALL60318..... 1/2" x 2"
- ALL60320..... 1/2" x 2-1/2"
- ALL60322..... 1/2" x 3"
- ALL60324..... 1/2" x 3-1/2"
- ALL60326..... 5/8" x 2"
- ALL60328..... 5/8" x 2-1/2"
- ALL60330..... 5/8" x 3"

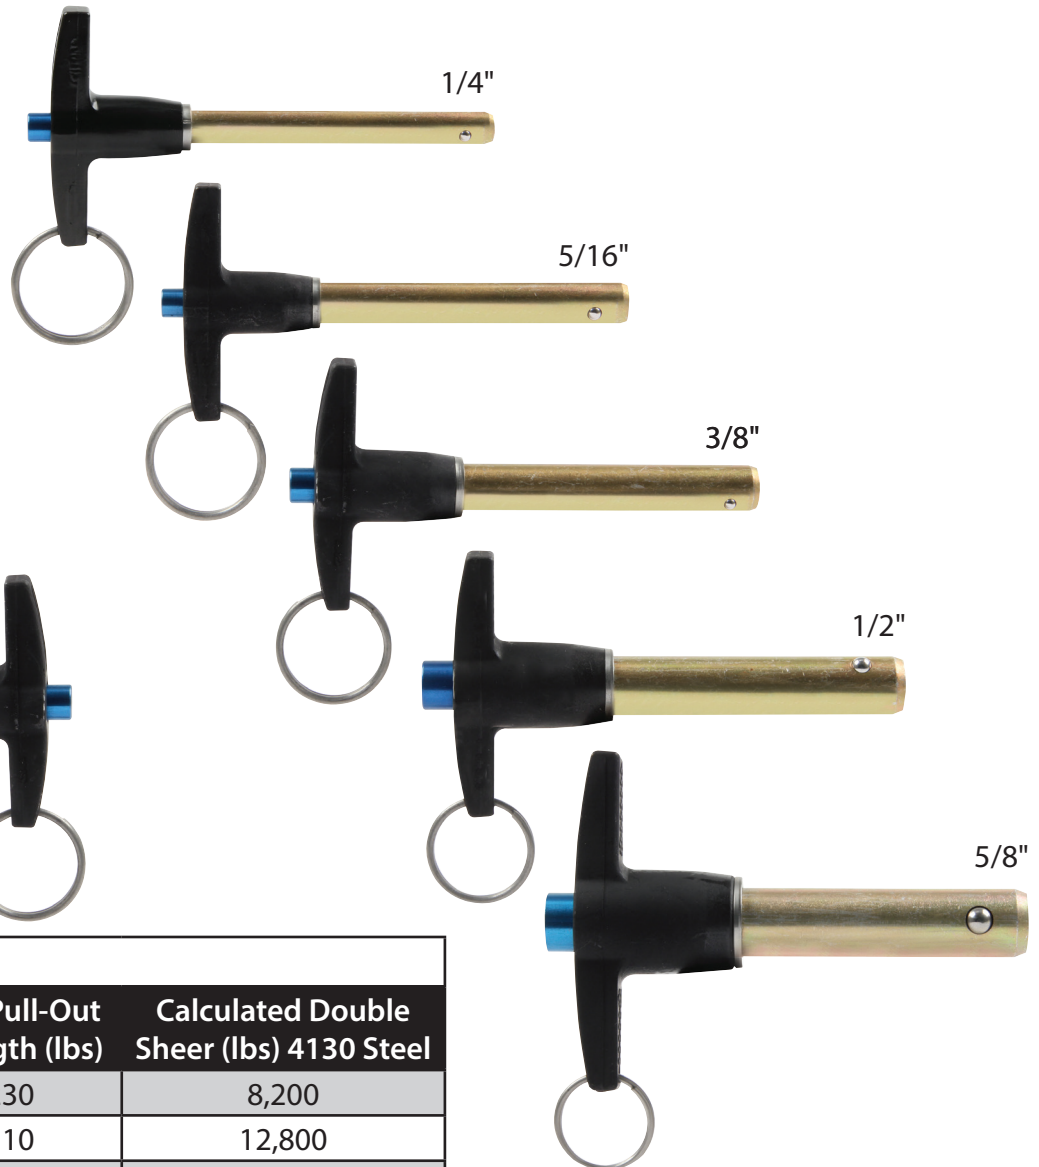

Lengths stated are from base of T-handle to top of detent ball

Performance Data				
Dia.	Hole Size		Min. Pull-Out Strength (lbs)	Calculated Double Sheer (lbs) 4130 Steel
	Max	Min		
1/4"	.2540	.2500	230	8,200
5/16"	.3165	.3125	510	12,800
3/8"	.3790	.3750	575	18,400
1/2"	.5050	.5000	1160	32,800
5/8"	.6300	.6250	2070	51,200

REV071316

Allstar Performance 8300 Lane Dr., Watervliet, MI 49098
Phone: (269) 463-8000 Fax: (800) 772-2618 www.allstarperformance.com