

Hellwig PRODUCTS.com





559-734-7451 800-367-5480 FAX 559-734-7460

INSTALLATION INSTRUCTIONS

Rear Stabilizer Bar

NISSAN TITAN

Thank you for purchasing a quality Hellwig Product.

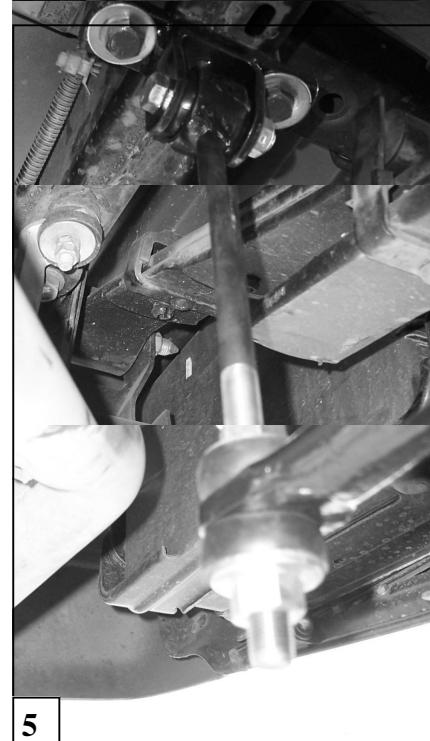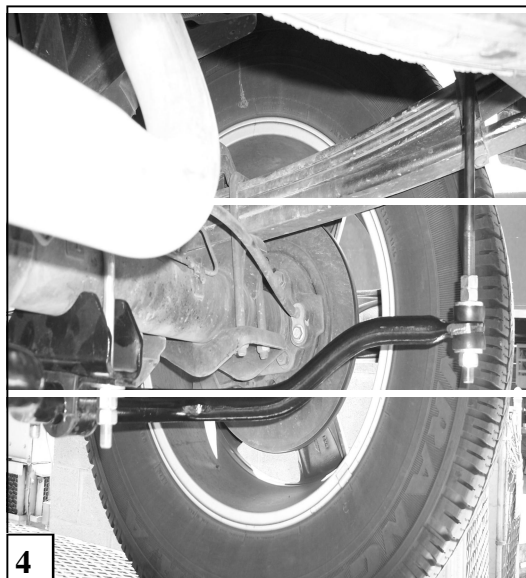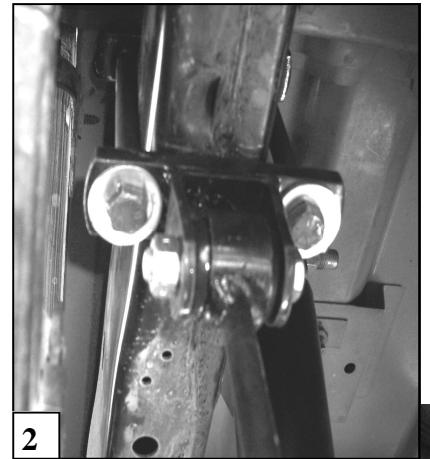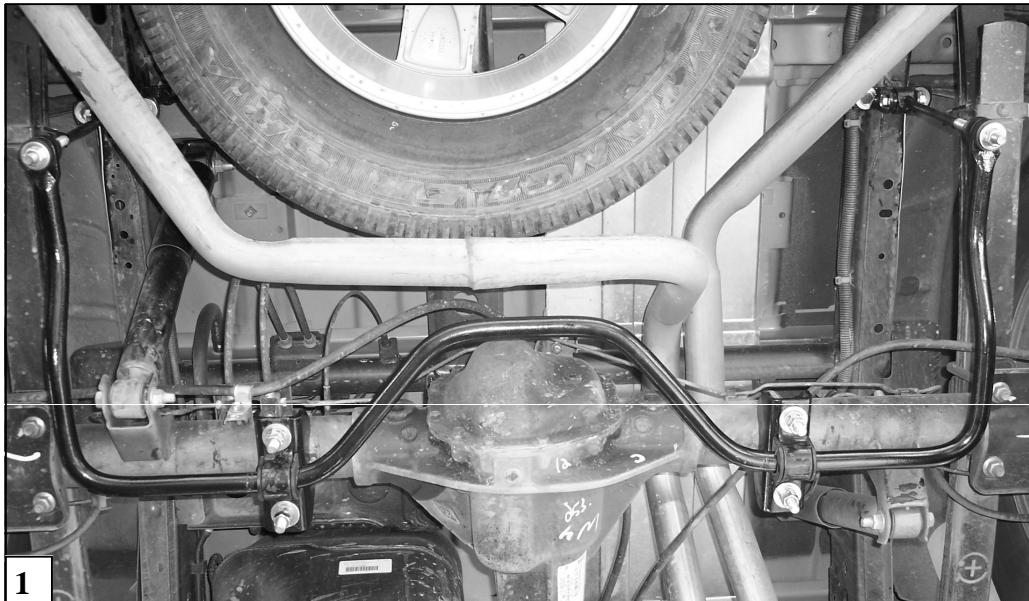

7669 (R-7669)

05/06/05

Hellwig PRODUCTS.com

559-734-7451 800-367-5480 FAX 559-734-7460

TORQUE TABLE

BOLT SIZE: 3/8" = 20-30 ft. lbs. – 7/16" = 35-45 ft. lbs. – 1/2" = 50-70 ft. lbs. – 9/16" = 70-90 ft. lbs.

SAFETY: BEFORE STARTING YOUR INSTALLATION, BE SURE TO SET PARKING BRAKE AND CHOCK THE WHEELS.

NOTE: TO EASE INSTALLATION AND TO PROPERLY ADJUST BAR, THE WEIGHT OF THE VEHICLE MUST BE ON THE SUSPENSION, AS IF DRIVING DOWN THE ROAD. DO NOT RAISE THE VEHICLE BY THE FRAME.

NOTE: THIS UNIT IS DESIGNED TO MOUNT TO THE BOTTOM OF THE AXLE WITH THE ARMS OF THE SWAY BAR POINTING TOWARDS THE REAR OF THE VEHICLE.

NOTE: THIS KIT INCLUDES LOCKNUTS WHICH REQUIRE TIGHTENING WITH A WRENCH AFTER BEING STARTED BY HAND.

1. Install the U-bolts over the axle with the legs towards the ground as in photo three (3). Insert the saddle brackets through the legs of the U-bolts. Install a hex nuts to temporarily support the saddle brackets to the axle. **They will be removed later.** Taking care as not to damage the brake or fuel lines mounted on the axle.
2. Locate and insert the D-shaped poly bushings in as close a location that the bushings will contact the U-bolts and saddle brackets installed on the rear axle. Position the U-plate brackets over the bushings. Remove the hex nuts supporting the saddle brackets, insert the legs of the U-bolts thru the holes of the U-plate brackets over the bushings. Tighten the 1/2" hex nuts on the U-bolts just enough to support the sway bar to the axle. **Leave loose at this time to allow for adjustment later. SEE PHOTO ONE (1).**
3. Locate the threaded frame brackets on top of the frame rail as shown in photo tow (2). Attach the frame brackets with the welded clevis using the 7/16" x 5-1/2" cap screws. Take care as not to damage any electrical wires, brake or fuel lines that run along the vehicles frame. Note that the cap screws will be pointing towards the vehicles body (up). **Leave loose to allow for adjustment later.**
4. Locate the end links and assemble with the poly bushings as in photos (4 and 5). Insert the hour glass poly bushings through the welded ends of the end links. Insert the steel sleeves through the hour glass poly bushings. (To ease installation lightly grease the steel sleeve and the hour glass bushing before assembling).
5. Insert the end links into the clevis of the frame brackets and attach using the 7/16" x 2-1/4" cap screw and locknut. **Leave loose to allow for adjustment later.**
6. Raise the arms of the sway bar and install the end link bushings on the arms of the sway bar as shown in the photos with the locknut on the bottom of the end link. Tighten the nuts until the poly bushings start to bulge. Do not over tighten or damage can occur to the poly bushings.
7. With the sway bar centered and the end links straight up and down as possible, torque all mounting components to the specified rates. Note that the bend on the sway bar arms will be towards the top of the vehicle as in photo (4).
8. Bounce the vehicle and check for clearance on under carriage components, shocks, exhaust, electrical wires, brake and fuel lines.
9. Test drive your vehicle recheck your installation readjust and tighten as needed. After one week of driving recheck your installation re-torque as needed. Recheck your installation on a monthly regular basis thereafter.

ATTENTION INSTALLER: PLEASE MAKE SURE CUSTOMER RECEIVES THIS INSTRUCTION SHEET, ALL IMPORTANT NOTE CARDS, WARNING CARDS AND THE WARRANTY FORM

7669 (R-7669)

05/06/05

Hellwig PRODUCTS.com

559-734-7451 800-367-5480 FAX 559-734-7460

PARTS LIST

RSB KIT # 7669

PART #	QTY	DESCRIPTION
20217669	1	1" SWAY BAR
20907669	1	COMPLETETION KIT # 7669
20800024	2	SADDLE BRACKET
118000156	2	1/2" X 3-5/8" X 6-1/2" ROUND U-BOLT
111000409	2	1" POLY BUSHING
20800378	2	U-PLATE
20800089	2	FRAME BRACKET WITH WELDED CLEVIS
20800090	2	1/2" X 12" END LINK
20800091	2	THREADED PLATE BRACKET
125020025	1	SMALL PARTS BAG # BG-025
101500022	4	7/16" X 5-1/2" CAP SCREW
102420041	4	7/16" FLAT WASHER
102400027	4	17/32" X .16" X 1" THICK FLAT WASHER
102520043	4	1/2" FLAT WASHER
105521044	10	1/2" HEX NUT
107521044	2	1/2" LOCK NUT
106501057	2	1/2" JAM NUT
111000762	4	1/2" END LINK BUSHING
101500185	2	7/16" X 2-1/4" CAP SCREW
107401042	2	7/16" LOCK NUT
111000050	2	5/8" HOURGLASS POLY BUSHING
20800046	2	7/16" X 1.38" STEEL SLEEVE
135007669	1	INSTRUCTION SHEET (R-7669)

7669 (R-7669)

05/06/05