



Input Voltage	Warranty	Max Output per Channel
12-15V DC	3yrs	20W

Warranty and Disclaimer

Within THREE years after the purchase date, the original buyer may return any XKGLOW products that has failed due to a defect in materials or workmanship.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.


- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- Installation of this product must be performed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer’s sole and exclusive remedy.
-

Return/Exchange Procedure

1. Email xk@xkglow.com to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

Mounting Instructions

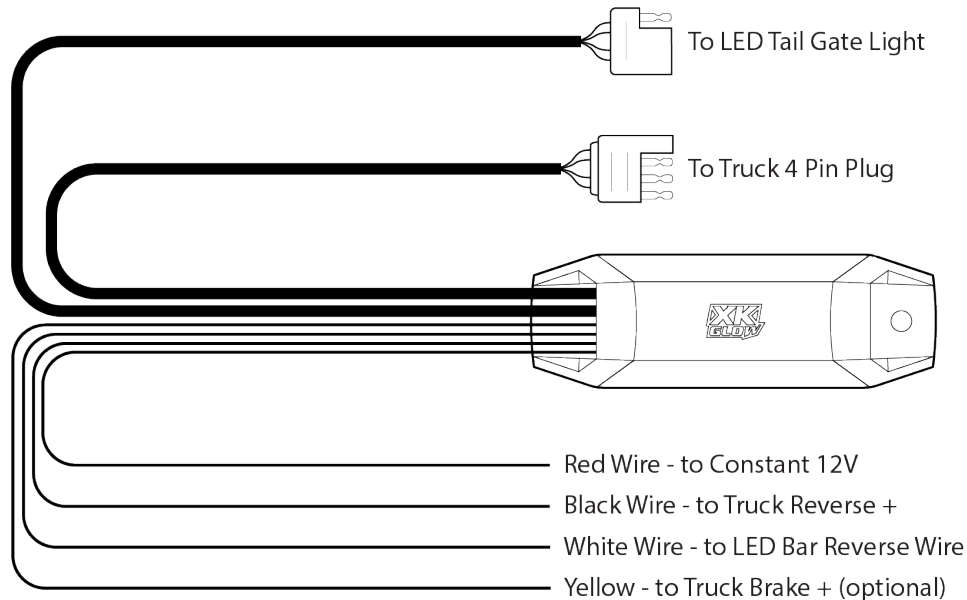

4 Pin Plug Install:

1. Plug the input plug from the Error Cancellor into the 4 pin plug on the truck.
2. Plug the output plug from the Error Cancellor into the XKGLOW Truck Tailgate Light Bar.
3. Connect the **BLACK** wire from the Error Cancellor to the reverse wire on the 7 pin trailer plug (**center pin**) or into the factory reverse light positive wire behind one of the tail lights. See service manual for vehicle's reverse + wire color.
4. Connect the **WHITE** wire from the Error Cancellor to the **BLACK** wire on the XKGLOW Truck Tailgate Light Bar. If using this install option, ignore the **YELLOW** wire.
5. Connect the **RED** wire from the Error Cancellor to a constant fused 12V power. This could be directly to the + battery terminal with a dedicated inline fuse or the 12V wire on the 7 pin trailer plug. Please note: 12V wire on the 7 pin trailer plug must be switched to constant-on power to ensure proper function. Consult service manual for process.
6. Secure module and any loose wiring.
7. Power on vehicle and test functionality.

Hard Wire Install:

1. Plug the output plug from the Error Cancellor into the XKGLOW Truck Tailgate Light Bar.
2. Remove the tail lights from the vehicle to gain access to the wiring.
3. Cut off the 4 pin plug from the Error Cancellor **that is not plugged into the Truck Tailgate Light Bar.**
4. Tap the **BLACK, RED, and GREEN** wire into its corresponding wire on the **left** side tail light. See diagram to the right for plug pinout. Use a multi-meter or see service manual for vehicle's wire colors.
5. The **YELLOW** wire from the 4 pin plug will be tapped into the turn signal positive wire on the **right** side of the vehicle. Use a multi-meter or see service manual for vehicle's wire colors.
6. Connect the **BLACK** wire from the Error Cancellor to the reverse wire on the 7 pin trailer plug (**center pin**) or into the factory reverse light positive wire behind one of the tail lights. See service manual for vehicle's reverse + wire color.
7. Connect the **WHITE** wire from the Error Cancellor to the **BLACK** wire on the XKGLOW Truck Tailgate Light Bar.
8. *Optional: If truck has dedicated amber signals and brake light, connect **YELLOW** wire to the positive brake wire.*
9. Reinstall tail lights.
10. Connect the **RED** wire from the Error Cancellor to a constant fused 12V power. This could be directly to the + battery terminal with a dedicated inline fuse or the 12V wire on the 7 pin trailer plug. Please note: 12V wire on the 7 pin trailer plug must be switched to constant-on power to ensure proper function. Consult service manual for process.
11. Secure module and any loose wiring.
12. Power on vehicle and test functionality.

