

Input Voltage	Max Power Output	Bulb Warranty
9-32V DC	65 watt	3 year

Warranty and Disclaimer

Within THREE years after the purchase date, the original buyer may return any Premier Series LED Bulb or Driver that has failed due to a defect in materials or workmanship.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

Additional Disclaimer Terms


Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.
-

Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).

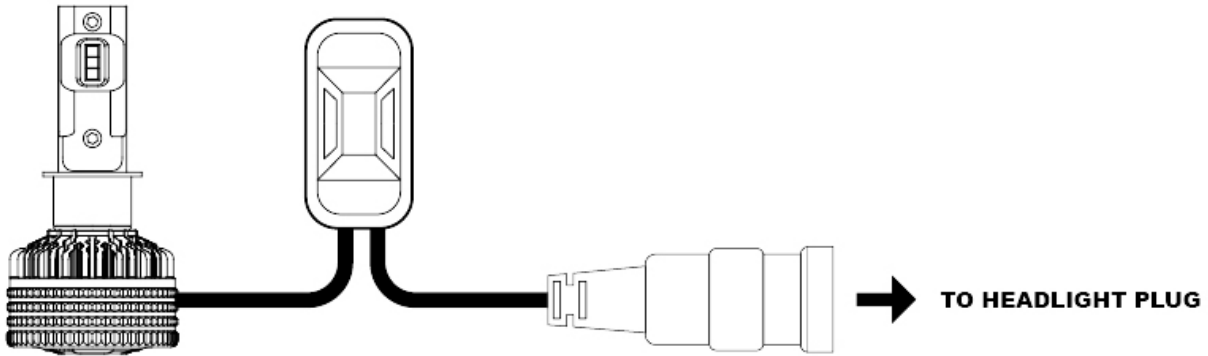

Mounting Instructions

Our Premier Series LED Bulbs have been precisely designed to be a direct replacement for their halogen counterparts utilizing the same plugs and sockets to meet industry standards. Installation is just as replacing a halogen bulb and should not require any modification to the plugs or sockets in *most* applications.

1. **Unplug and remove halogen bulb:** Carefully unplug and remove the halogen bulb from the headlight housing. In some applications, it may be required to remove a plastic dust cover to gain access to the headlight bulb.
2. **Install LED bulb:** Replace the halogen bulb with new LED bulb. In some applications where retaining clips are used, it may be easiest to remove the collar from the bulb and install separately. Simply twist the collar on the bulb counter-clockwise and remove the collar. After the collar is installed, reinsert the bulb into the collar and twist clockwise to lock into place. Tuck LED driver away.
3. If applicable, reinstall plastic dust cover or rubber grommets that were removed during install.