



## Warranty and Disclaimer

Input Voltage	26in Bar Power	30in Bar Power	36in Bar Power
12V DC	72W	90W	108W

## Warranty and Disclaimer

**Within THREE years after the purchase date, the original buyer** may return any light that has failed due to a defect in materials or workmanship. Lights that have one or more LEDs fail to illuminate due to a defect in materials or workmanship are covered with a THREE year warranty for **the original buyer**.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

## Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.


## Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact [xk@xkglow.com](mailto:xk@xkglow.com). We normally respond within 24 hours. (Monday-Friday).

### Mounting Instructions

- Test all parts before mounting:** Before mounting, connect all components as shown below on a test bench to verify all functions work properly.

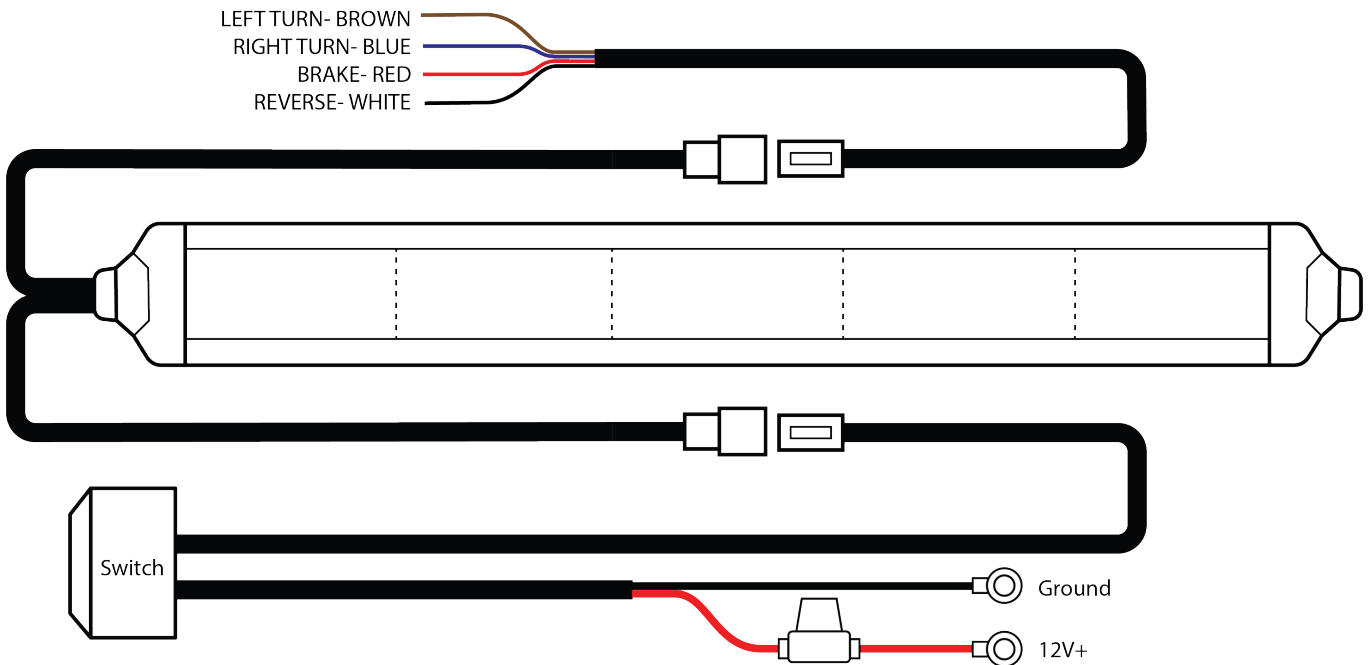

- Choose Mounting Location:** Locate the light bar, wiring harness, and switch to desired mounting locations. Route all wires to make sure they will not get pinched, cut, or damaged.
- Wire Bar to the Harness:** Once all mounting locations are confirmed, connect the switch to the wiring harness. If using the optional turn signal, brake, and reverse function, wire the harness as shown above.
- Connect to Battery:** Connect to 12V+ and ground. Press the switch button to test if corresponding modes are working properly.
- Adjust Light Bar:** Adjust the light position to meet your lighting needs. Firmly secure all mounting screws.

### Switch Functions

- There are nine different strobe modes in this light bar. The provided switch is a 3-position switch. To change the strobe mode, press the switch in the momentary position to select the next mode.
- When you turn off the light and wait for at least 2 seconds, the last running strobe mode will be automatically saved as the default strobe mode.
- Hold the momentary switch down for 3 seconds to turn off the strobe mode completely. The sensor wires will still work in this mode.