




Prior to working on your vehicle,
make sure to read instructions
carefully.

1995-2006
JEEP TJ

Bill of Materials


- (1) Grille
- (2) VB-(2.0- V Bracket)
- (2) VB-(2.5-V Bracket)
- (2) R18-(18- Round bar)
- (1) Instruction sheet



Installation Instructions


1

Remove coolant reservoir.

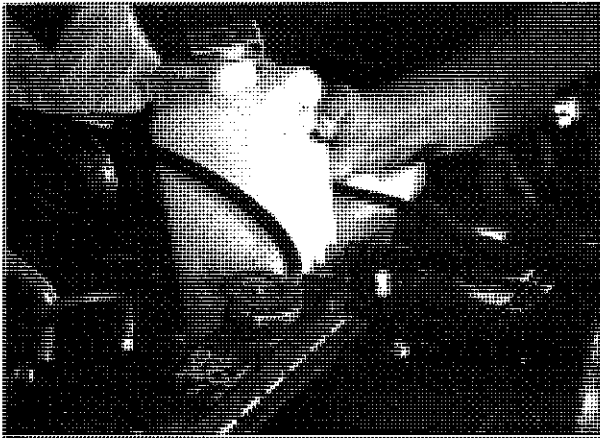

2

Remove (2) 10mm bolts on top of radiator and
(2) from bottom of radiator.

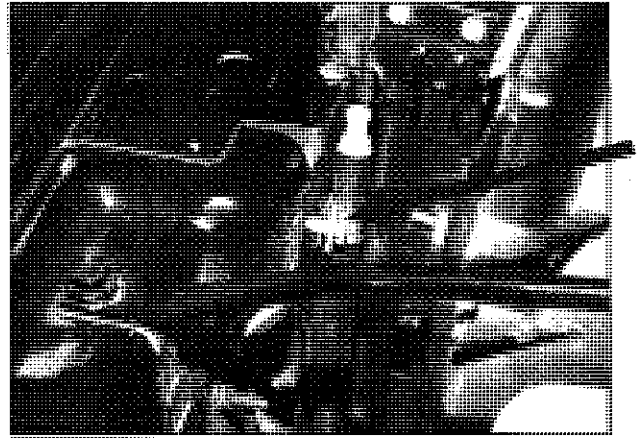

3


Remove (2) 10mm bolts on top of "AC" radiator,
and push to create a 2" gap. **Make sure radiators
are tied off to maintain gap clearance.**

Push




4


Remove "V" bracket (3) 10mm bolts.

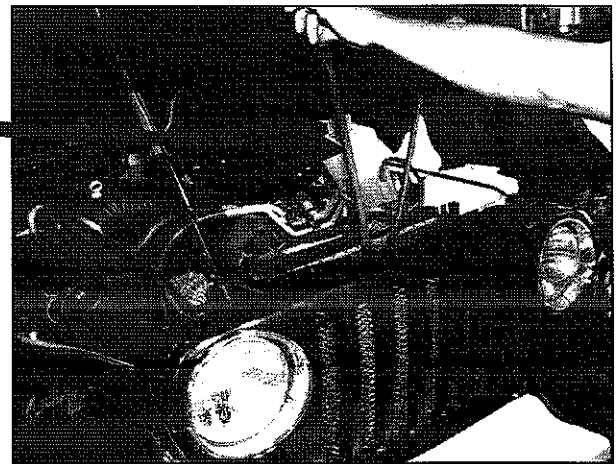

5 Locate the top of new grille (for orientation) and insert the grille under the bumper in the gap and line up with vehicle fascia.

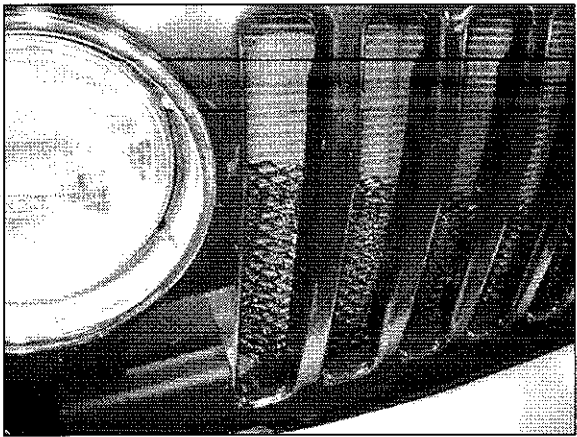

6 Insert rods (R16) through existing top holes and locate bottom holes for step 7.

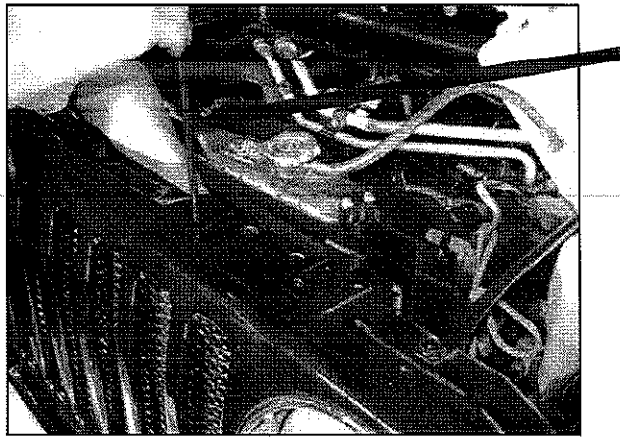


7 Feed brackets VB2.5 (bottom) and VB2 (top) on R18 and space apart. Insert rod into bottom holes.




VB2
VB2.5

8 Using wide flat screwdriver, from the outside, insert through the grille and push against the rod to allow adjustment of V Brackets.

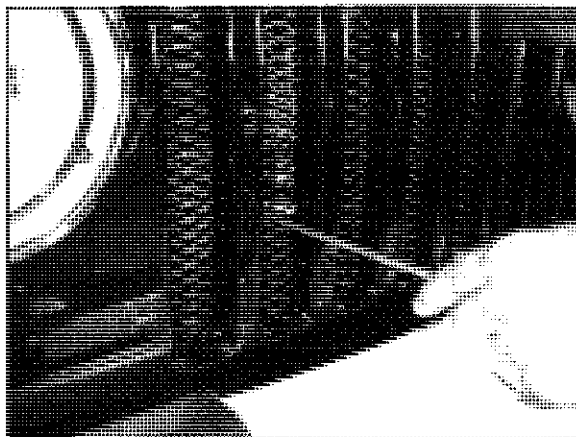

9 Replace items 4, 3, 2, and 1. Please refer to your vehicle owners manual for proper bolt tightening procedures.

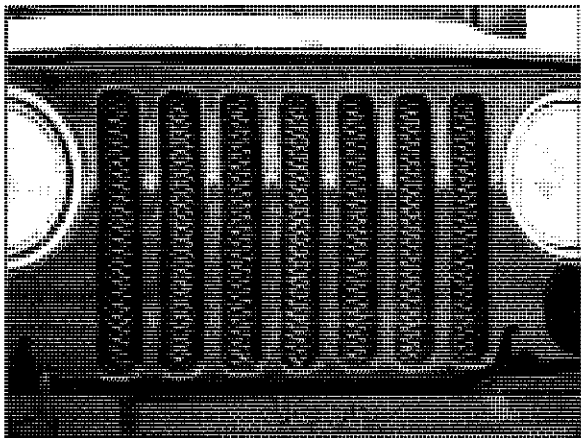

Thank you for purchasing our product.

