



INSTALLATION INSTRUCTIONS

Part Number: HA-3021

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter can last many seasons. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N® air filter seals properly.

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

INSTALLATION:

- 1) Remove your stock air filter from the air box.
- 2) Clean all sealing surfaces in the air box from any dirt or debris.
- 3) Install the provided air filter plate onto the K&N air filter. Fig. 1
- 4) With filter plate on the filter, install into the air box. Fig. 2 and 3

Note: Line up the tabs of the plate to the 2 grooves inside the air box.

- 5) To secure filter push frame onto the locking tabs. You will hear and feel a click when installed Fig 4 and 5

Note: While pushing towards locking tabs, be sure to push frame into the air box ensuring plate clears the air box.

- 6) Test the filter for proper fit and seating before riding or installing the seat.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1

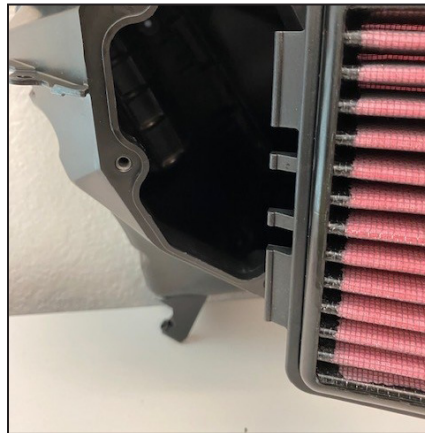


Fig. 2



Fig. 3



Fig. 4

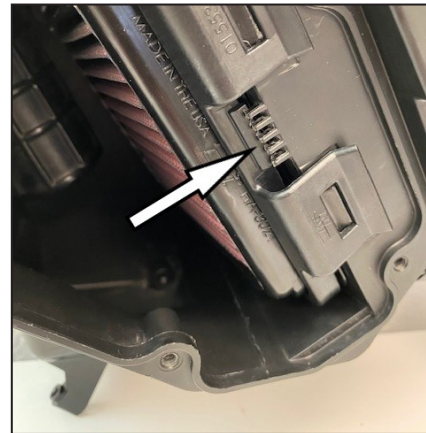


Fig. 5

CLEANING:

K&N Engineering, Inc., suggests checking the air filter element periodically for excessive dirt build-up. Depending on your driving conditions, we recommend cleaning your air filter every 50,000 miles. To clean and re-oil, purchase our filter Recharger® service kit, part number 99-5050 or 99-5000 and follow the easy instructions.