




Installation Instructions

Manual Kit Install

Item # FC0034HK

Applications: 64.5-66 Mustang, 63-66 Falcon, 64-66 Fairlane, Ranchero, Comet, Cyclone,

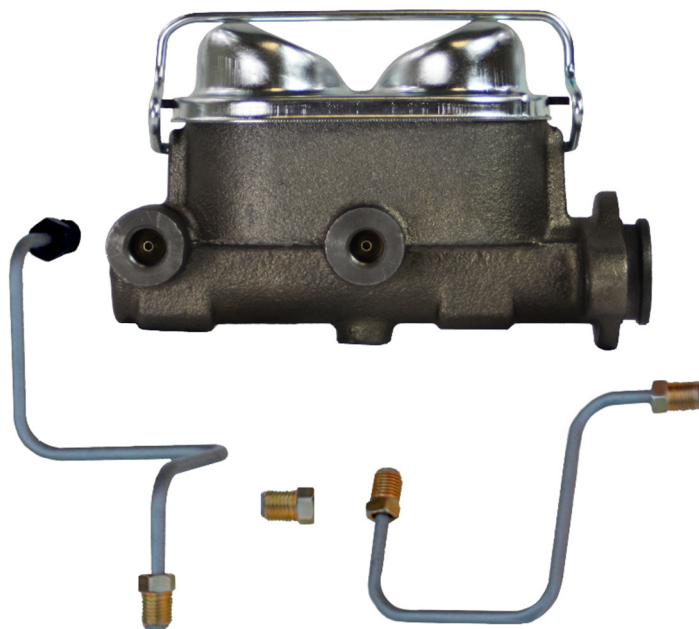

Thank you for choosing Leed Brakes for your automotive product needs. Before you begin your installation please inspect all parts immediately and contact our customer service team at 716-852-2139 if you have any missing or damaged or incorrect parts.

Please take the time to review these installation instructions prior to disassembly of your current brake system to insure a smooth installation. If you have any questions regarding your installation please call our customer service team at 716-852-2139

LEED Brakes 3248 Union Rd Cheektowaga, NY 14227 (716)852-2139 www.leedbrakes.com INS0118

Tools required for a safe and smooth installation:

Proper Jack & Jack Stands, Tube Wrenches, Standard Socket Set, Standard Wrench Set, Torque Wrench, Lug Wrench, Pliers, Mallet, Brake Fluid, Brake Cleaner.

Fitment Notes:

Some 1964.5 Cars may require an additional adapter fitting to re-install the pressure switch for the brake lights. These adapters are available thru most Mustang parts sources.

Vehicle Prep :

1. Safely raise the vehicle off the ground until the wheels are clear and spin freely. Support the vehicle using the appropriate Jack Stands and remove the front wheels.
2. Remove wheels for easy access to the bleeders on your calipers & wheel cylinders.
3. From under the dash remove the pushrod from the pedal assembly.
4. Disconnect the brake line(s) from your master cylinder. ***Be very careful not spill any brake fluid on any painted surfaces as it will damage your paint.***
5. Remove all hardware retaining your current master cylinder or power booster to the firewall and remove from vehicle.

Brake line Installation:

1. Remove the steel brake line going from the original master cylinder to the factory distribution block.
2. Disconnect the rear brake line from the distribution block and plug the port in the distribution block with the **3/8-24 plug** provided.
3. Install the **union provided** to the factory rear brake line.
4. Install the **new brake line supplied with (1) 9/16-20 fitting and (1) 3/8-24 fitting** into the other side of the union. The other end of this line will go to the rear brake port of the master cylinder (port furthest from the firewall) once the master cylinder is installed.
5. Install the **"U" shaped brake line** into the port on the distribution block that was fed by your original master cylinder. The short leg of the line will install in the **front brake port** (port closest to the booster) of the master cylinder later on.

Master Cylinder Prep:

1. Dry fit your master cylinder to the vehicle before adding fluid to ensure your brake lines and pushrod all align properly.
2. Before you install your master cylinder you must **bench bleed** it in a vice off of the vehicle using the **bench bleeder kit** provided.
3. To Bench Bleed
 - a. Place your master cylinder in a **vice** by the mounting ears.
 - b. Attach a clear plastic hose to the short end of each of the plastic nozzles provided.

- c. Clip the plastic bridge onto the partition wall of the master cylinder and insert each plastic tube into the holes insuring the end of the tube will be fully submerged in the brake fluid.
- d. Press the tapered end of the nozzles firmly into the master cylinder ports with a twisting motion.
- e. Fill the reservoir with new clean brake fluid (DOT 3 or DOT 4 Recommended).
- f. Using a large Phillips head screwdriver push the piston in, then release using full strokes.
This MUST be done until ALL air has disappeared from the clear plastic hoses.

CAUTION- MASTER CYLINDER WILL NOT BLEED PROPERLY IF HOSES ARE NOT FULLY SUBMERGED IN BRAKE FLUID UNTIL THE BLEEDING PROCESS IS COMPLETE.

Master Cylinder Install:

1. Remove the master cylinder from the vice and install on the firewall, secure with factory hardware. ***Be very careful not spill any brake fluid on any painted surfaces as it will damage your paint.***
2. Carefully remove the bleeder kit nozzles and install the brake lines in the appropriate ports.
3. Install the brake line with the 9/16" fitting to the port for the rear brakes (port furthest from the firewall)
4. Install the ½-20 fitting into the port for the front brakes (port closest to the firewall)
5. Secure all brake lines and check for leaks.
6. Reinstall factory pushrod

Bleeding the vehicles braking system:

We recommend that the brake system is bled using a gravity bleed method. While there are many ways to bleed a system this way is less likely to introduce air in the system causing a spongy pedal. Whenever bleeding your system you must keep an eye on your fluid level. If your master runs dry you will have to bench bleed the master again.

1. Remove the cap from the master cylinder.
2. Starting at the right rear wheel cylinder or caliper attach a clear hose to the bleeder with the other end in a clear container.
3. Open the bleeder and observe the fluid flow. It may take a couple of minutes for the fluid to flow with a new system. Once the fluid begins to flow let it drip until you do not see any air.
4. Move to the left rear wheel, repeat step 3.
5. Move to the right front wheel, repeat step 3.
6. Move to the left front wheel, repeat step 3.
7. Repeat steps 2 thru 6 once more.
8. Install the lid on the master cylinder.
9. Pump the brake pedal until you achieve a firm pedal.
10. Remove lid on master cylinder & check fluid level
11. Repeat steps 2 thru 6 to insure all air has been removed.

(Continued on next page)

Once you feel you have successfully removed all air from your brake system you may install your wheels, and spin them to insure they still spin freely and your brakes are not dragging or locked up.

You may now take your vehicle for a test drive in a safe area. If you have installed new rotors, drums and/or brake pads it is recommended that you drive the vehicle with light to medium application of the brakes for the first 150-200 miles. This will allow your brake pads to properly seat to your rotors and/or drums with optimal braking performance.

That completes the installation of your hydraulic. If you purchased a kit containing other disc brake components, please refer to the separate instructions provided with those components.

If you have any questions please call our tech line at 716-852-2139

Thank you for purchasing from Leed Brakes we hope you have had an enjoyable experience.