

INSTALLATION GUIDE

Performance Aluminum Radiator fits 2019+ Ram 6.7L Cummins

SKU: MMRAD-RAM-19

TABLE OF CONTENTS

- Pg 1** RESOURCES AND CONTACT INFORMATION
- Pg 2** IMPORTANT SAFETY INFORMATION
REQUIRED TOOLS
INSTALLATION INSTRUCTIONS
- Pg 4** DISPOSAL INSTRUCTIONS
WARRANTY INFORMATION

RESOURCES & CONTACT

-  **CALL 1-877-GOMISHI**
CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST
-  **MISHIMOTO**
-  **GOMISHIMOTO**
-  **MISHIMOTO**
-  **WEBSITE**
WWW.MISHIMOTO.COM
-  **ENGINEERING BLOG**
WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

REQUIRED TOOLS

CONTAINER FOR COOLANT	¼" RATCHET
POP CLIP TOOL	8MM SOCKET
PLIERS	10MM SOCKET


INSTALL TIME: 4 HOURS

INSTALL DIFFICULTY: 


***Note:** To avoid potential injury, wait for the engine to completely cool off before working on the cooling system

INSTALLATION INSTRUCTIONS

1. Drain the cooling system.
2. Remove the stock radiator from the vehicle.
3. Ensure the drain bolt on the Mishimoto radiator is tight then place the radiator in position and install the provided lower rubber mounts as shown.

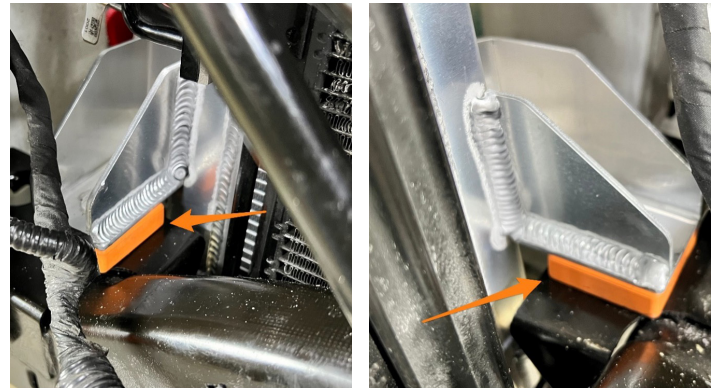

4. Swap the stock upper mounts onto the Mishimoto radiator as shown and fasten the radiator using the stock bolts.

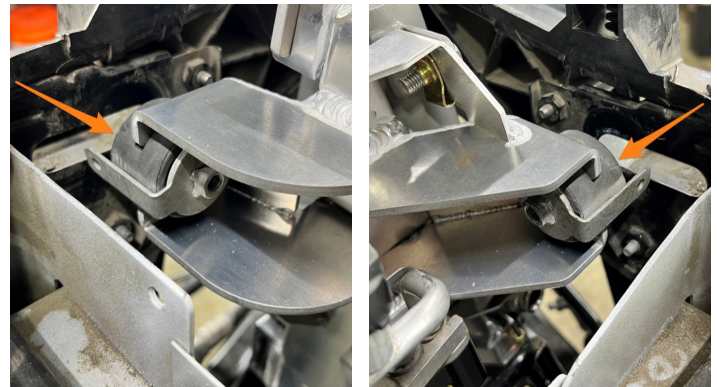


Continued on next page


- 5.** Apply the provided foam strip to the top of the radiator as shown. It should be up against the forwardmost lip of the "C" channel on the top of the core.




- 6.** Reassemble as you would with the stock rad reusing the stock hardware to fasten the fan shroud. Use the provided M8 bolts to fasten the A/C condenser to the radiator. Use the provided M6 bolts and washers to fasten the transmission cooler to the radiator. (Mishimoto transmission cooler pictured).

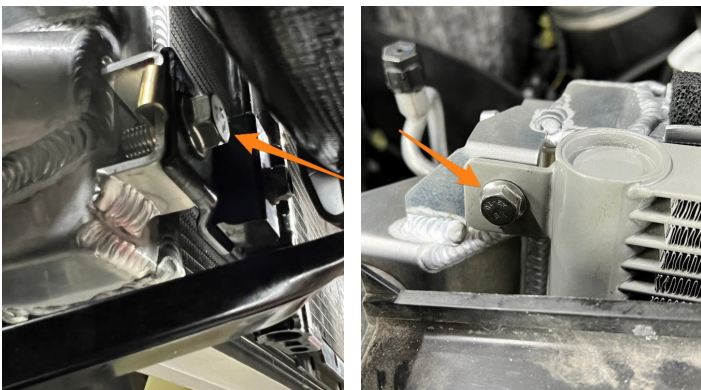

- 7.** Ensure there is adequate clearance between the A/C condenser and the transmission cooler.

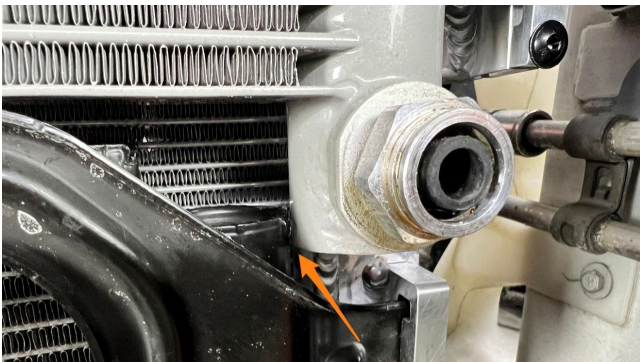

- 8.** Using the provided M5 Allen bolts and a 3mm Allen wrench, tighten the tab clamps for the A/C condenser and transmission cooler.

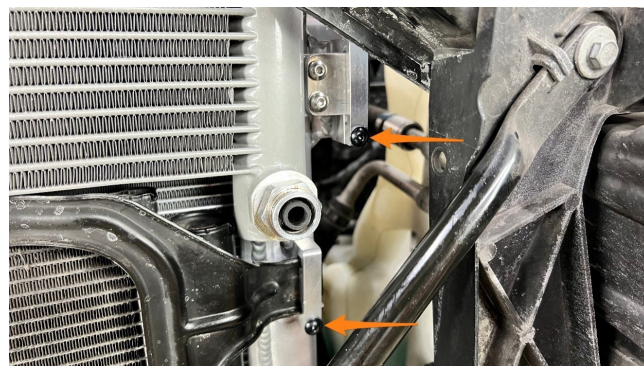

- 9.** Refill the cooling system, test drive, and check for leaks.

This concludes the installation.

Continued on next page

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals.

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on Mishimoto.com in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov