



Parts List

- (1) Air Oil Separator
- (1) Billet Clamp
- (1) Billet Spacer
- (2) Stainless Steel Mounting Brackets
- (1) ½" Barbed Fitting
- (1) 3/8" Barbed Fitting
- (1) Ball Valve
- (1) 90 Degree Drain
- (1) Drain Cap
- (5) ¼-20x1 SHCS
- (2) ¼-20 Nylock Nuts
- (1) 3/8" Hose
- (1) ½" Hose

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com

Rev A
62113

85515INST



Step 1: Remove intake cover.



Step 2: Locate PCV line.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com



Step 3: Remove PCV line from intake.




Step 4: Remove PCV line from PCV valve.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com



Step 5: Install 3/8" hose to PCV valve.

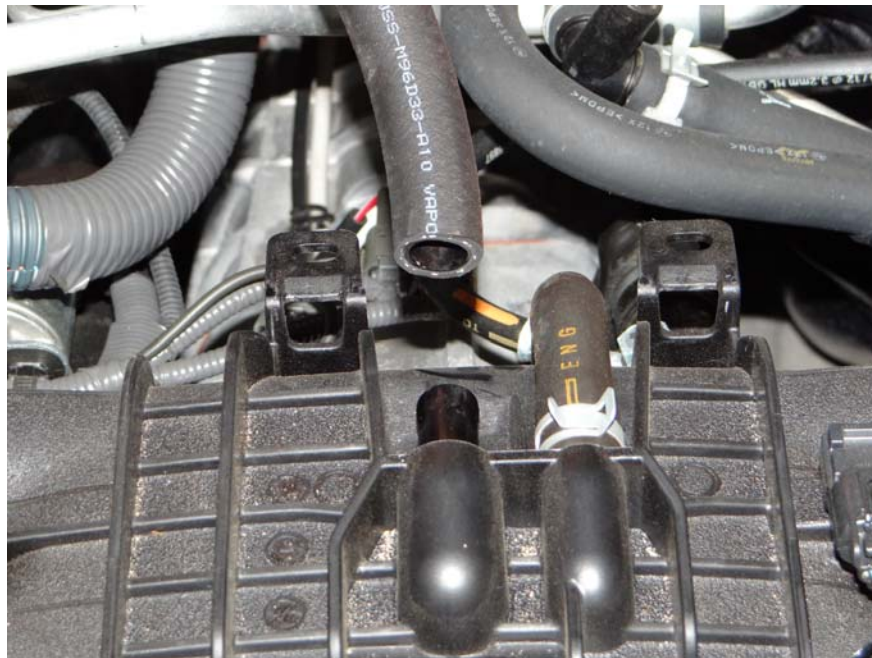

Step 6: Install 1/2" hose to intake nipple.


For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com




For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com

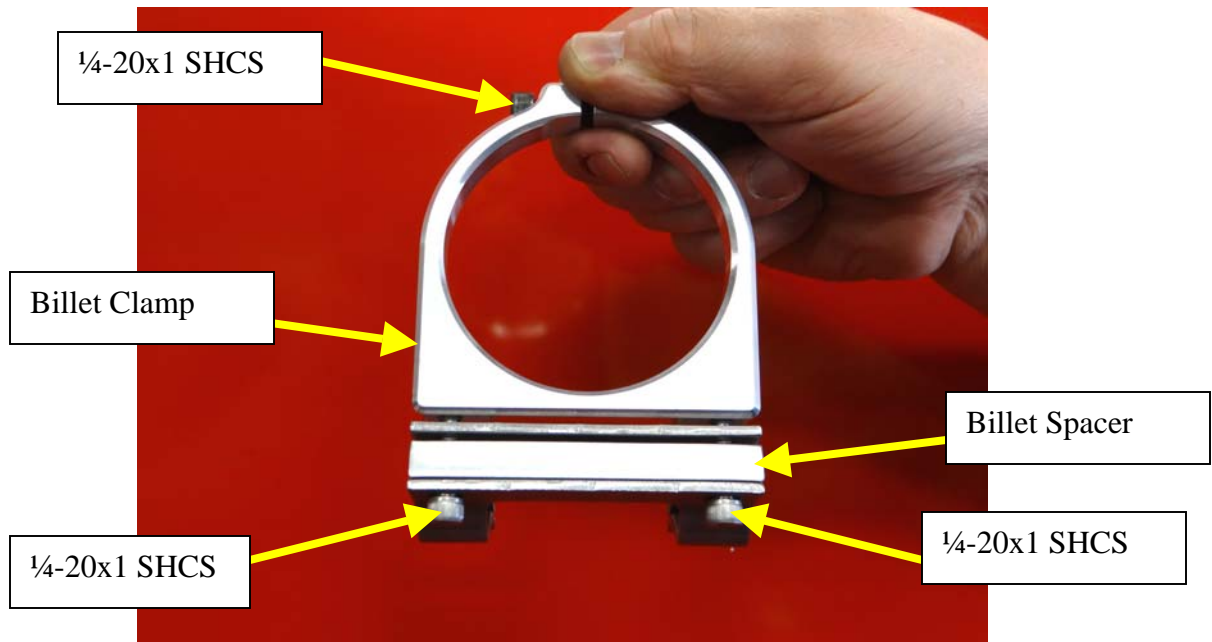

Step 7: Assemble Billet Clamp to stainless mounting brackets as shown.

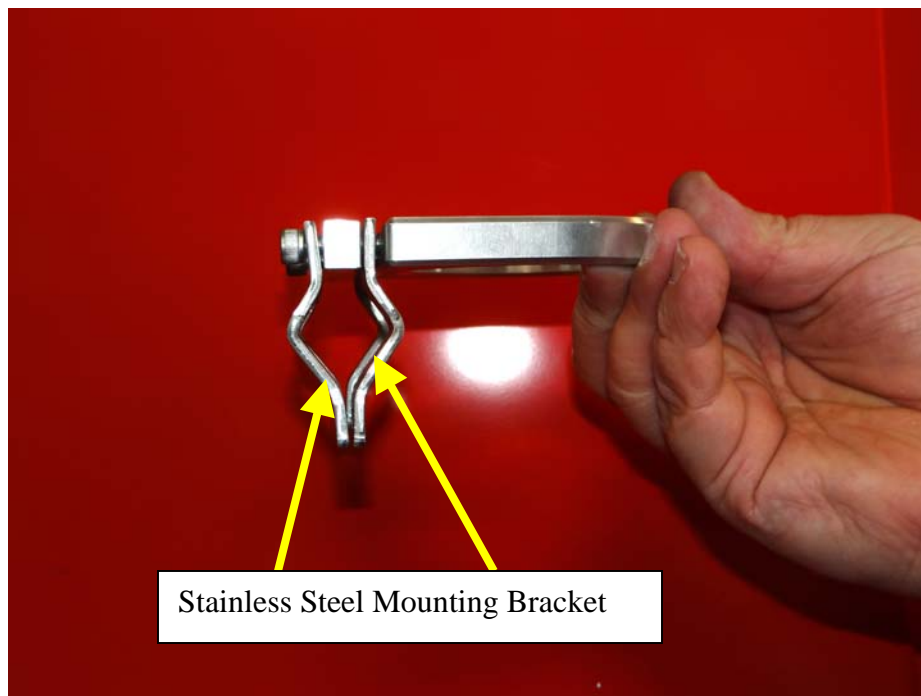

Note: Do not tighten hardware at this time.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com




Step 8: Install mounting bracket to passenger's side strut brace as shown.




For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com

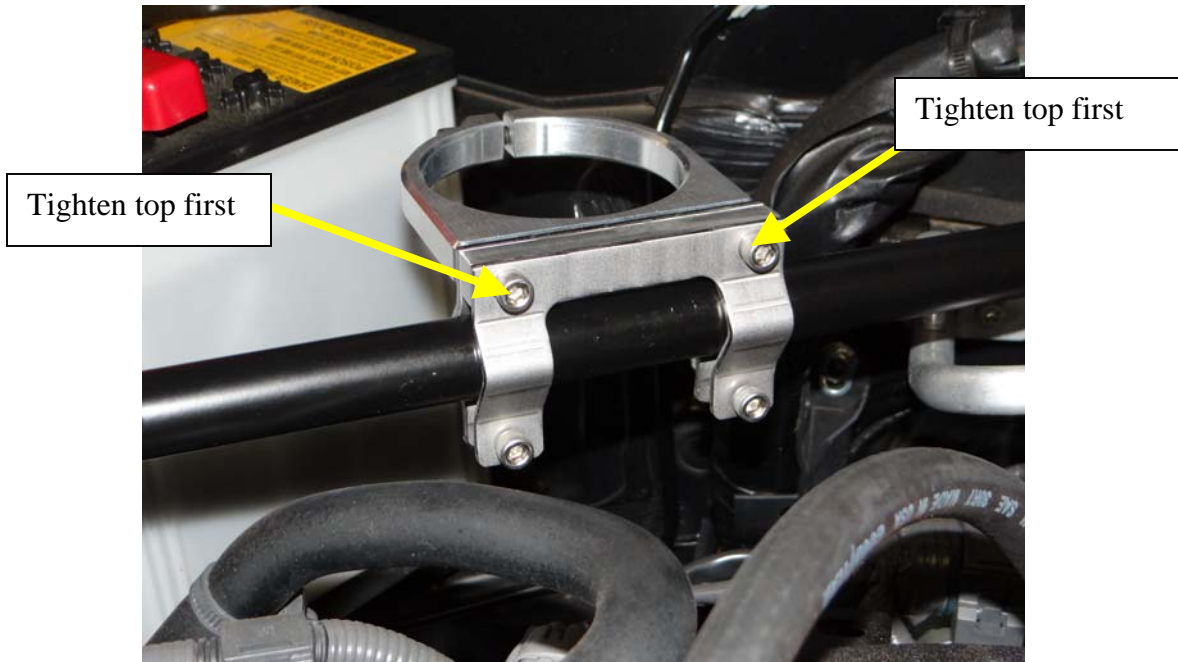

Step 9: Tighten top (2) 1/4-20x1 SHCS first, then install (2) bottom 1/4-20x1 SHCS with (2) nylock nuts.

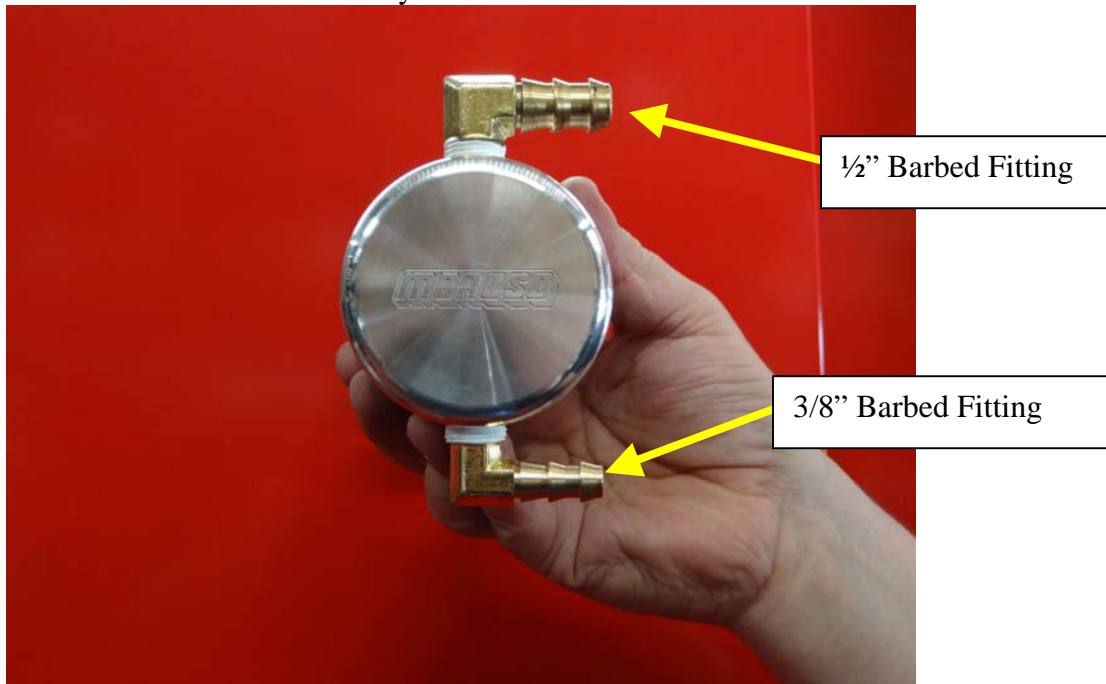

Step 10: Assemble 3/8" barbed fitting and 1/2" barbed fitting using Teflon Tape.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com



Step 11: Assemble Ball Valve, 90 degree Drain Tube and Drain Cap, using Teflon Tape on threads.



Step 12: Insert Air Oil Separator into billet clamp.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com



Step 13: Orientate barbed fitting towards driver's side and tighten clamp.



Step 14: Install 3/8" hose to 3/8" barbed fitting on Air Oil Separator.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com




Step 15: Install 1/2" hose to 1/2" barbed fitting on Air Oil Separator.



Step 16: Re-install intake cover.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.

80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com

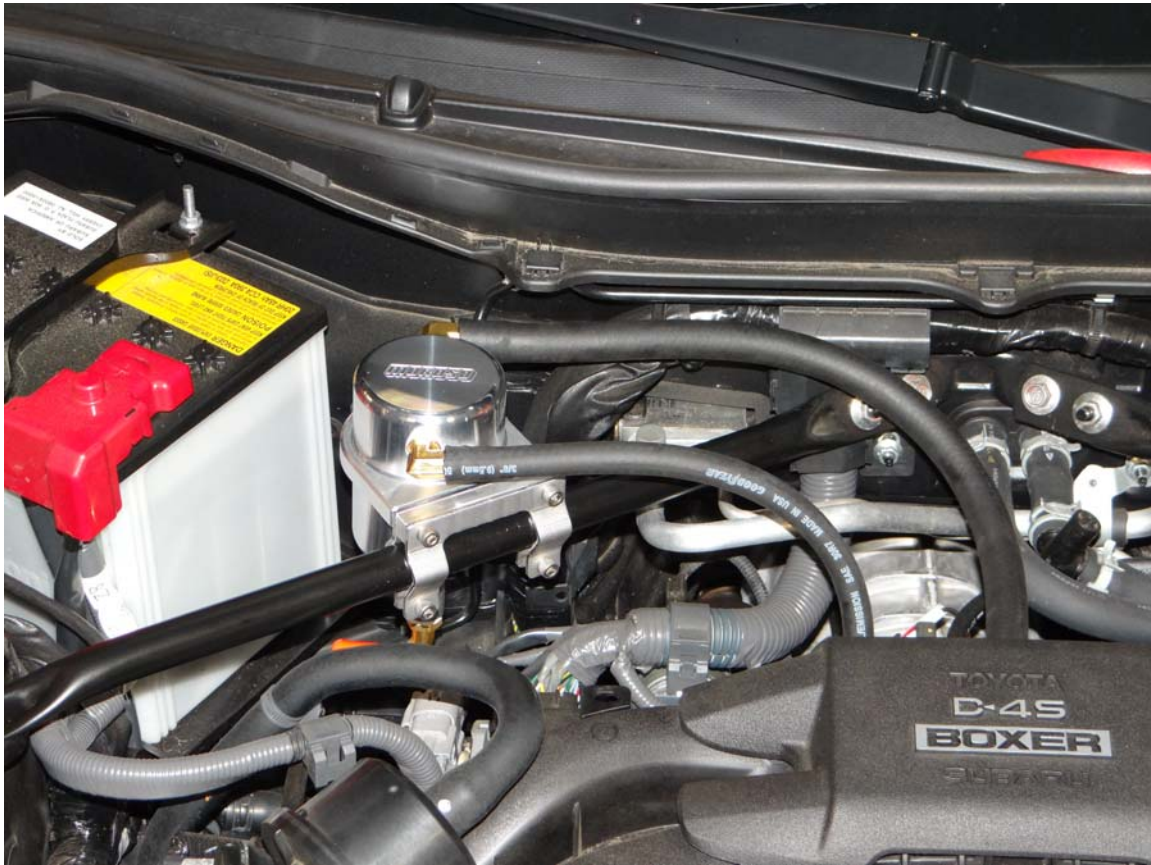

Installation Complete

Draining of Air Oil Separator is needed; this will depend on driving conditions (i.e.) normal day to day driving check every 1,000 miles until a baseline is established. A good baseline is to drain the Air Oil Separator when it is about HALF full. This will vary with temperatures (cold winters vs. hot summers). For track usage Air Oil Separator will need to be drained after every outing.

There are several different methods to draining Air Oil Separator. The first and simplest method is to place a cup or MOROSO part # 65805 under drain elbow and open ball valve, once draining is complete close ball valve. The second method is to run a length of 1/2" hose from elbow to under carriage of vehicle and place drain pan under vehicle at this time open ball valve, when draining is complete close ball valve. This hose may also be permanently installed for future draining.

For Technical Assistance, call Moroso's Tech Line
(203)-458-0542, 8:30am-5:00pm Eastern Time
MOROSO PERFORMANCE PRODUCTS, INC.
80 CARTER DRIVE
GUILFORD, CT 06437
www.moroso.com