

Powerglide 1.58 Ratio Extreme Planetary Assembly Kit

Part No.
28158G-06

- Carrier Assembly
- HY-Tuf Output Shaft (Long Length)
- 1.58 Extreme Gear Set
- 24-Tooth Drum Flange
- Ring Gear
- Reverse Clutch Kit
 - Piston with Seals
 - Piston Plate
 - Pressure Plate
 - Frictions (7)
 - Steels (8)

Patent Pending

NOTE: Requires Sonnax 24-tooth high gear clutch drum **28755-01**, **28755-08**, **28755-01K** or **28755-08K**.

Also Available

High Gear Clutch Drum Kit

28755-01K

28755-08K With Bearing

High Gear Clutch Drum

28755-01

28755-08 With Bearing

Powerglide 1.58 Ratio Extreme Planetary Assembly Kit

28158G-06S HY-Tuf Output Shaft (Short)

28158G-06SP 300M Output Shaft (Short)


GM Powerglide®



Set Reverse Clutch Clearance

The Sonnax 1.58 ratio extreme planetary assembly kit includes seven frictions and eight steels as well as a pressure plate, piston plate and piston. The pressure plate and the piston plate both can be used as a reaction surface for the frictions.

- a. Install the reverse clutch piston, piston plate and the pressure plate in the transmission case.
- b. Measure the distance between the bottom of the pressure plate to the top of the piston plate. This is your available space for clutch stackup and clearance (**Figure 1**).
- c. If using all seven frictions and six steels, the piston face will need to be machined to achieve the desired clearance. Sonnax has included two extra steels with the kit to fill space when reducing the number of frictions from the maximum of seven down to four, five or six. The piston face may be machined as needed to adjust the total clearance. Recommended clearance is typically .009" to .013" per friction.

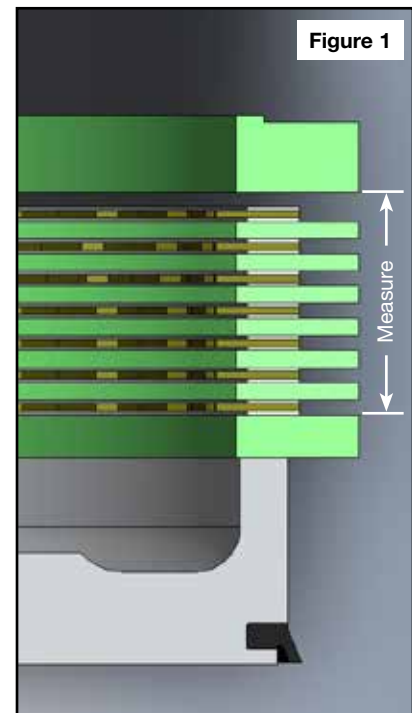

Notes & Cautions

Use Premium Oil

For maximum gear longevity, a premium oil is required. Avoid non-synthetic Type F and low-cost Dex/Merc fluids as these oils are not suitable for the high loads in a racing gearset. Consider partial or fully synthetic THF (tractor hydraulic fluid) used in wet-clutch gear box applications or other premium fluids.

Do Not Use Case as an Electrical Ground

Electrical arcing has been found in racing Powerglide gearsets. 16 Volt systems draw 25% more amperage through all electrical devices. To prevent electrical arcing within the gearset inside the transmission, do NOT use the transmission case as an electrical ground. All solenoids and electrical devices should have dedicated ground wires, of suitable gauge, run to a ground stud that is grounded by wire directly to the battery.