





**757-842-6497**  
**WWW.JLOSC.COM**

**J&L 3.0 Oil Separator, Driver Side (2012-2017 Jeep JK 3.6L)  
#3064D**

**Installation Instructions**

Please review complete instructions prior to installing.


Step#	
1	<b>Verify you have all of the following parts included in the kit:</b> (1) J&L Oil Separator with hoses, (1) J&L Mounting bracket, (2) Fine thread machine screws
2	<b>Gather all of the following tools needed for the installation:</b> Phillips screwdriver & 8mm socket and ratchet
3	<p>Using the 8mm bolt holding the AC line to the computer bracket, mount the supplied J&amp;L bracket</p> <p><b>2012-2014 Models</b></p>  <p><b>2015-2017 Models</b></p> 

Using the supplied screws, mount the Oil Separator to the bracket with "O" toward the rear and "C" toward the front of the vehicle. As so it's readable from the passenger side.



4

REMOVE ENGINE COVER BY PULLING STRAIGHT UP AND PULL FORWARD.  
Route hoses under intake tube and throttle body up into the intake manifold area.  
Unplug hard PCV line from angled rubber connection.  
Plug J&L line with male fitting into the rubber angled connection and the rubber female to the factory hard line shown here:

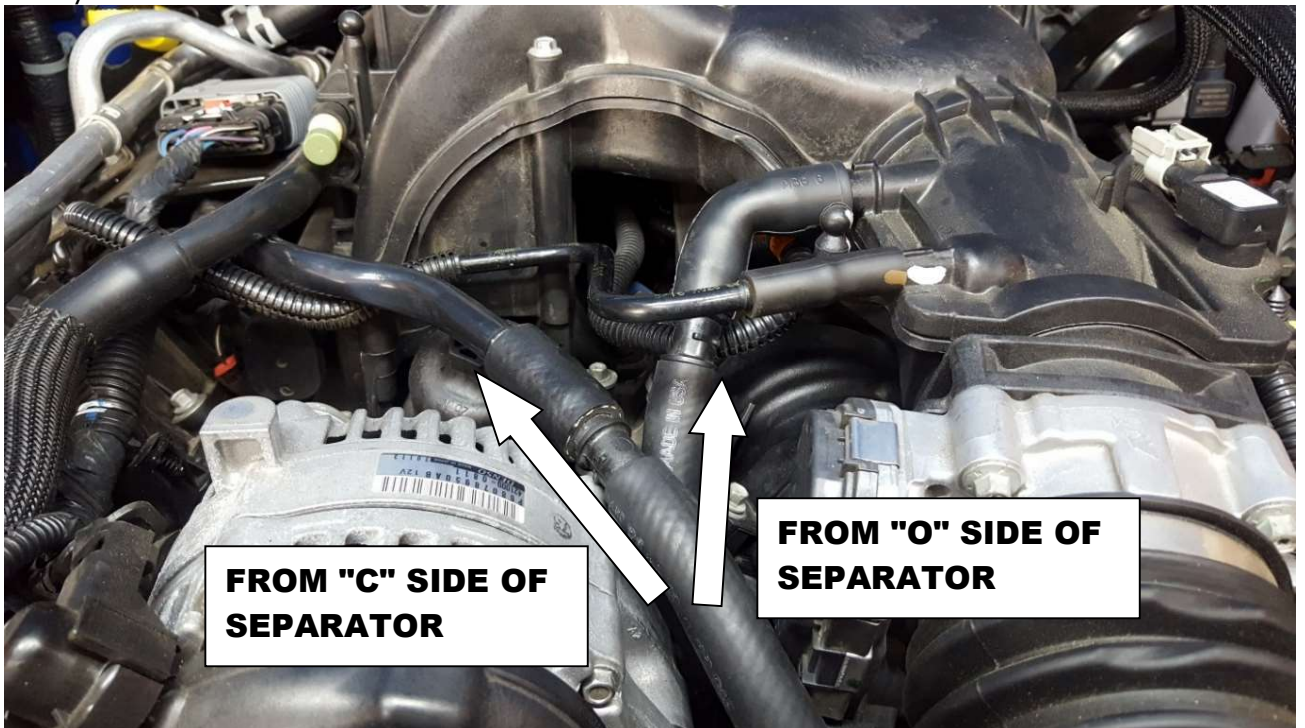

5



To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles. Thank you for your business. If you have any questions, please e-mail [info@JLosc.com](mailto:info@JLosc.com) or call 757-842-6497. Our hours are Monday-Friday. 8:00am – 4:30pm Eastern Time.

**J&L Oil Separator co. Lifetime Satisfaction Guarantee. We want you to be a J&L customer for life!** Your new J&L product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. [www.JLosc.com/warranty](http://www.JLosc.com/warranty)

We guarantee workmanship and even a pathway to discounted upgrades for substantially improved items.

**Return Policy:** All returns will be subject to a 10%-25% restocking fee. Please visit [www.JLosc.com](http://www.JLosc.com) for complete return policy.

**Disclaimer:** J&L Oil Separator co. makes no warranties whatsoever, expressed, or implied, oral or written to any purchasers, except the warranty above. J&L Oil Separator co. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by J&L Oil Separator co. agree to hold harmless and indemnify J&L Oil Separator co. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to J&L Oil Separator co. for any claims arising out of use of its products.