



Nitrous Pressure Switch - Adjustable Bottle Pressure Switch


PART NUMBER 00-60002

INSTALLATION INSTRUCTIONS

The Nitrous Outlet Adjustable Nitrous Pressure Safety Switch is adjustable from 750-1200 PSI and helps your systems bottle heater maintain a constant pressure. To set the switch, using 1/8" Allen wrench, tighten the set screw (clockwise) to increase pressure and loosen (counter clockwise) to decrease pressure. Only make adjustments of 1 turn at a time giving the bottle at least 10 minutes to stabilize between adjustments. One full turn will adjust the pressure by approximately 150 PSI. You will need a gauge in one of the puch ports of the bottle, or an inline manifold close to the bottle to accurately read your bottle pressure and set the switch.



NITROUS OUTLET — BOTTLE HEATER WIRING DIAGRAM - WRAP AROUND STYLE

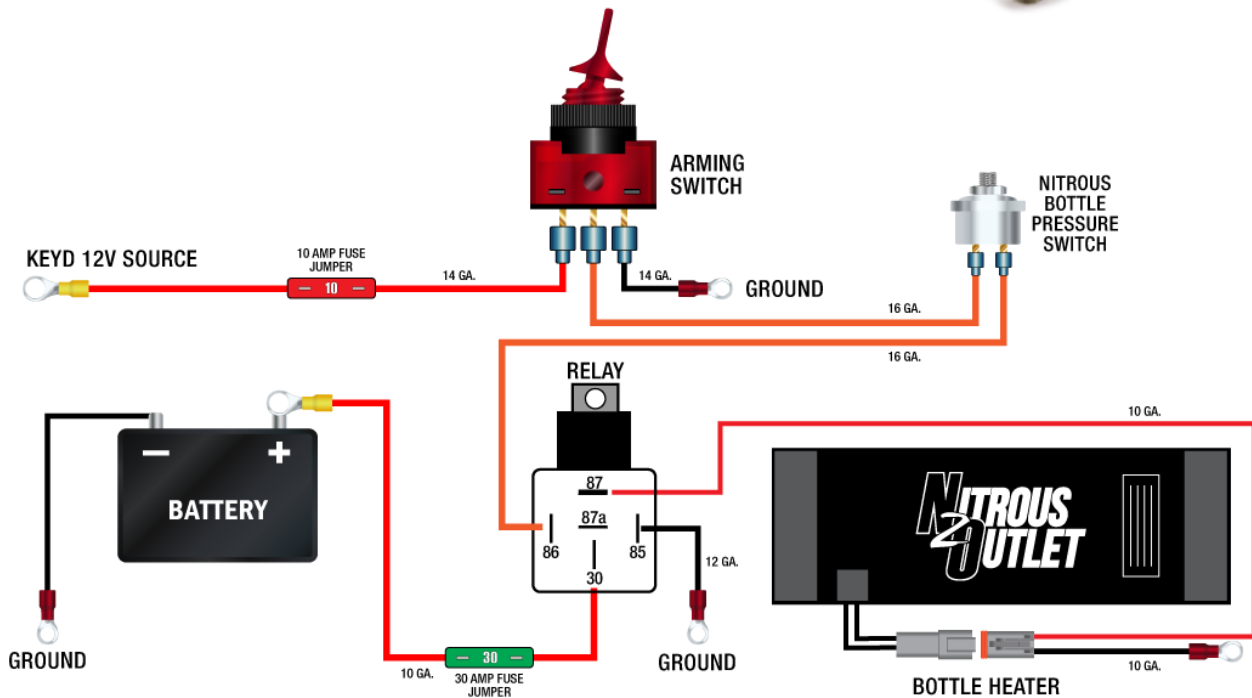

NITROUS OUTLET	BOTTLE HEATER WIRING DIAGRAM - WRAP AROUND STYLE	BOTTLE HEATER WIRING DIAGRAM - WRAP AROUND STYLE A1
06/10/2020 03	1	THIS DOCUMENT AND THE DESIGN OR INFORMATION CONTAINED WITHIN ARE THE SOLE PROPERTY OF NITROUS OUTLET AND MAY NOT BE COPIED, DISTRIBUTED OR MADE AVAILABLE TO OTHERS WITHOUT PERMISSION.



IMPORTANT: All appropriate safety equipment (gloves, tools etc.) must be used during the installation of this product(s). Nitro Dave's LLC accepts NO responsibility for injuries or damages resulting during and/or from the installation of any product(s). Nitrous oxide is for off-road use only.

WWW.NITROUSOUTLET.COM/INSTALLATION-GUIDES